


Cord Operated Curtain Track System

Silent Gliss® 3000

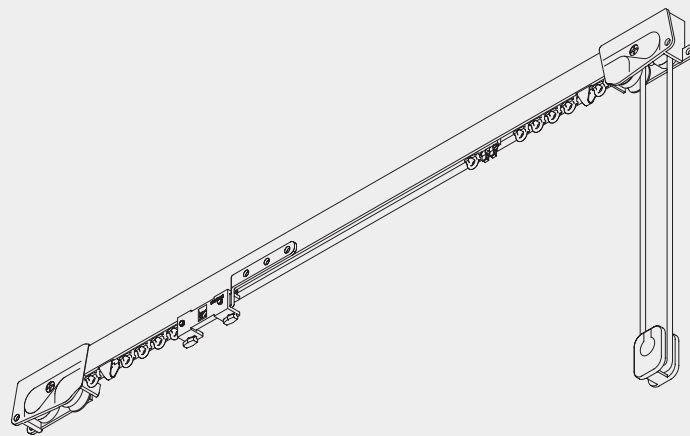

Product Information

- Strong and elegant, the most attractive corded track available
- Enclosed cord channels - the cord cannot slip out, making it the perfect choice for bay windows
- Can be forward and reverse bent - a unique feature made possible by the enclosed channels
- Can be corded from both ends for extra heavy curtains or where one curtain is wider than the other
- Easy ceiling or wall fix to all surfaces
- Standard colours: silver, white, gold, antique bronze, black, brushed aluminium
- Standard lengths: 5m (silver and white), 6m (silver, white, gold, bronze and black), 4m (brushed aluminium)
- The above features mean System 3000 is highly regarded by many professional curtain fitters as the best available
- Can be bent




3000

www.blindtrack.co.uk

Blindtrack
Unit 23
Orbital 25
Dwight Road
Watford
WD18 9DA
020 8421 6605
sales@blindtrack.co.uk

Profile, Bending and Specification Information




Due to the enclosed channels, this curtain track can be forward and reverse bent. The standard bending radius of 200mm can be reduced to as low as 100mm for reverse and forward bends if no overlap arm is used.


Specification Information - download from www.silentgliss.co.uk (password required).

Silent Gliss 3000 curtain track, cord drawn, anodised aluminium, assembled complete with gliders 3533 at 16/m. cord guide/return set 3288, pilot runners 3030 and 3213, overlap 3242 and cord 3090 (cord drop 1500mm. R.H.S.). Face fixed with nylon bracket 3630/top fixed with nylon bracket 3603 each screwed to timber/plugged and screwed to block/concrete at 600mm centres.Lm. in.....lengths. Silent Gliss 3000W, as 3000 except in powder-coated white-finished aluminium.

How to Measure

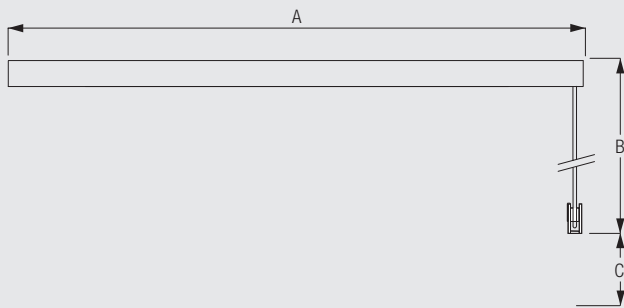

A: system width
 B: cord height
 C: cord retainer 10400 must be installed at least 150cm above the floor
 (ref: EN13120 Child Safety)



System Dimensions



6m



15kg

Maximum curtain weight chart

	1 m	2 m	3 m	4 m	5 m	6 m
	15	15	14	14	13	13
	15	15	14	14	13	13
	11	10	9	7	6	5
	11	10	9	7	6	5
	6	5	5	4	4	3
	6	5	5	4	4	3
	5	4	4	3	3	2
	5	4	4	3	3	2

(kg max.)


Straight tracks can be extended beyond 6m by using a connecting bridge and intermediate pulley.

Fitting Information

WARNING

Young children can be strangled by loops in pullcords, chains, tapes and inner cords that operate the product. To avoid strangulation and entanglement, keep cords out of the reach of young children. Cords may become wrapped around a child's neck. Move beds, cots and furniture away from window covering cords. Do not tie cords together. Make sure cords do not twist to create a loop.

Bracket positioning

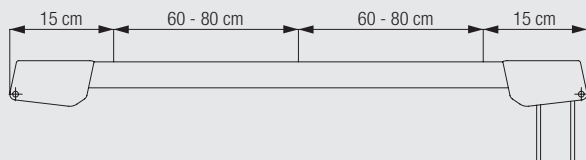


The fixing distances above are meant as a guide only, they may vary in practice depending on surface and curtain weight.



3000

Fixing with universal bracket


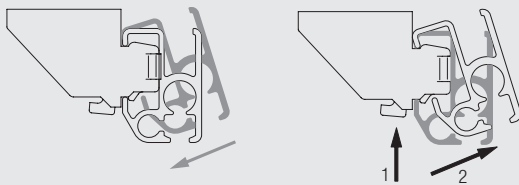


Applicable with 3603/3630/3655/3660.

Installation: roll track onto bracket in direction indicated
Removal: 1. press to release 2. Rotate forward for removal


Fitting Options

Ceiling fix with bracket 3603





It is possible to fix two tracks in front of one another. When doing this allow 80-100mm between the front of the two profiles.

Ceiling fix with bracket 3603 and double arms 3272/3273/3274

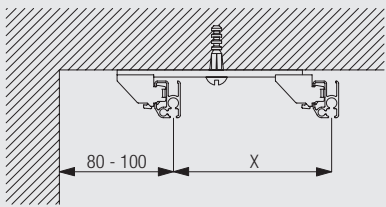


X (mm)
52
75
105






Double arm is threaded for screw 6748 (M4 x 8) for fixing the bracket 3603

Suspended fix with bracket 3603 and hanger rod system 3639


3000

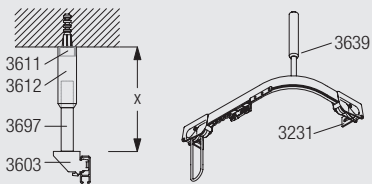




X (m)
3639 1.25 max.




Wall fix with universal brackets 3630/3655/3660





x (mm)
3630 39
3655 54
3660 69



Wall fitting with Smart Fix 11200-11205 and bracket 3603



X (mm)
11200 76
11201 96
11202 116
11203 136
11204 166
11205 216



Brackets feature thread for screw SG 10492 (M4x8) for fixing bracket SG 3603.

Wall fitting with Square Smart Fix 11210-11215 and bracket 3603



	X (mm)
11210	76
11211	96
11212	116
11213	136
11214	166
11215	216




11210-15
Square Smart Fix
(60-200 mm)



3603
Top fix bracket

Brackets feature thread for screw SG 10492 (M4x8) for fixing bracket SG 3603.

Wall fitting with Universal Smart Fix 11154-11156 and bracket 3603



	x (mm)
11154	127-155
11155	157-185
11156	207-235

11154-56
Universal Smart Fix
(120-200 mm)

3603
Top fix bracket

Brackets feature thread for screw SG 10277 (M4x12) for fixing bracket SG 3603.


Standard Accessories

18R	Screw 25mm. No. 8 roundhead		1082	Profile		 3000
3070	Twist eye endstop		3090	Cord (ø 3.5mm)		
3242	Overlap arm		3534	Glider 3533 in strip form		
3630	Bracket		10400	Safety Cord Retainer		

Sets

3288	Cord guide set with return, containing	3030	Pilot runner	1	
		3213	Adjustable pilot	1	
		3282	Cord guide left	1	

3283 Cord guide right 1




Optional Accessories

3030 Pilot runner



3045 Metal overlap arm



3213 Adjustable pilot




3533 Glider




3570 Rotating glider




3618 Wall support



3655 Long universal bracket




11155 Universal Smart Fix, 150 mm set



11200 Smart Fix, 60 mm set



11202 Smart Fix, 100 mm set




11204 Smart Fix, 150 mm set




11210 Square Smart Fix, 60 mm set



11212 Square Smart Fix, 100 mm set



11214 Square Smart Fix, 150 mm set




0516 Pelmet spacer



3032 Spring stop



3208 Intermediate pulley




3231 Endfix bracket




3548 Retrofit glider




3603 Top fix bracket




3620 Connecting bridge




11154 Universal Smart Fix, 120 mm set




11156 Universal Smart Fix, 200 mm set



11201 Smart Fix, 80 mm set




11203 Smart Fix, 120 mm set




11205 Smart Fix, 200 mm set




11211 Square Smart Fix, 80 mm set



11213 Square Smart Fix, 120 mm set



11215 Square Smart Fix, 200 mm set



3000








Sets

3289 Cord guide set with return, containing

3030 Pilot runner

1



3213	Adjustable pilot	1	
3290	Cord guide left	1	
3291	Cord guide right	1	
3639	Hanger rod assembly		
3697	Rod	1	
3611	Stud	1	
3612	Support with screw	1	
3699	Track insert	1	

Sewing Information and Accessories







Diagram uses standard glider measured to the inside of the glider eye. For optional gliders substitute dimensions below:

3570 = 6.0
3548 = 7.5



3000

3562	Standard tape	
3582	Hook	

3571	Hook	
3599	Hook	